

# Special Relativity

- 1) Speed of light is constant in all inertial frames of reference
- 2) Physical laws must look the same in all inertial frames of reference - there is no experiment that can determine the "absolute" velocity of any inertial frame

⇒ If a flash of light goes off at the origin of some coord system, the outgoing wavefronts look spherical in all inertial frames.

Equation of wavefront is  $r^2 - c^2 t^2 = 0$

⇒  $(x, y, z, t)$  coords in one inertial frame  $K$

$(x', y', z', t')$  coords in another inertial frame  $K'$  that moves with velocity  $\vec{v} = v\hat{x}$  with respect to  $K$ .

What is the transformation that relates coords in  $K'$  to coords in  $K$

$$y = y', \quad z = z'$$

(origins of  $K$  and  $K'$  coincide when  $t = t' = 0$ )

$$\Rightarrow c^2 t^2 - x^2 = c^2 t'^2 - x'^2$$

$$\Rightarrow \frac{(ct+x)(ct-x)}{(ct'+x')(ct'-x')} = 1$$

Expect transformation to be linear

otherwise particles moving at constant  $v$  in one frame might look accelerated in another frame

$$\Rightarrow ct' + x' = (ct+x)f$$
$$ct' - x' = (ct-x)f^{-1}$$

for some constant  $f$ . Write  $f = e^{-y}$   $y$  is rapidity

Solve for  $ct'$  and  $x'$  in terms of  $ct$  and  $x$

$$ct' = ct \left( \frac{e^y + e^{-y}}{2} \right) - x \left( \frac{e^y - e^{-y}}{2} \right)$$

$$x' = -ct \left( \frac{e^y - e^{-y}}{2} \right) + x \left( \frac{e^y + e^{-y}}{2} \right)$$

$$ct' = ct \cosh y - x \sinh y$$

$$x' = -ct \sinh y + x \cosh y$$

meaning of parameter  $y$

(at  $x=0$ )

the origin of  $K$  has trajectory  $x' = -vt'$  in  $K'$

$$\Rightarrow \frac{x'}{t'} = -v$$

from transformation above, with  $x=0$ , we get

$$\frac{x'}{ct'} = \frac{-ct \sinh y}{ct \cosh y} = -\tanh y$$

$$\text{so } \frac{v}{c} = \tanh y$$

$$\Rightarrow \cosh y = \frac{1}{\sqrt{1 - \left(\frac{v}{c}\right)^2}} \equiv \gamma$$

$$\sinh y = \left(\frac{v}{c}\right) \gamma$$

Lorentz Transformation

$$\begin{cases} ct' = \gamma ct - \gamma \left(\frac{v}{c}\right) x \\ x' = -\gamma \left(\frac{v}{c}\right) ct + \gamma x \end{cases}$$

Inverse transform obtained by taking  $v \rightarrow -v$  in above

$$\begin{cases} ct = \gamma ct' + \gamma \left(\frac{v}{c}\right) x' \\ x = \gamma \left(\frac{v}{c}\right) ct' + \gamma x' \end{cases}$$

### 4-vectors

4-position:  $X_\mu = (x_1, x_2, x_3, ict)$   $x_4 \equiv ict$   
 $X_\mu X_\mu \equiv \sum_{\mu=1}^4 X_\mu^2 = r^2 - c^2 t^2$  Lorentz invariant scalar  
 - has same value in all inertial frames

Lorentz transf  $\hat{L}$

$$\left. \begin{aligned} x_1' &= \gamma \left( x_1 + i \left(\frac{v}{c}\right) x_4 \right) \\ x_2' &= x_2 \\ x_3' &= x_3 \\ x_4' &= \gamma \left( x_4 - i \left(\frac{v}{c}\right) x_1 \right) \end{aligned} \right\} \text{linear transf, can be represented by a matrix}$$

or  $x_\mu' = a_{\mu\nu}(L) x_\nu$

$\hat{L}$  matrix of Lorentz transformation  $L$

$$a(L) = \begin{pmatrix} \gamma & 0 & 0 & i \frac{v}{c} \gamma \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ -i \frac{v}{c} \gamma & 0 & 0 & \gamma \end{pmatrix}$$

inverse:  $x_\mu = a_{\mu\nu}(L^{-1}) x_\nu'$

$a_{\mu\nu}(L^{-1})$  is given by taking  $v \rightarrow -v$  in  $a_{\mu\nu}(L)$

we see  $a_{\mu\nu}(L^{-1}) = a_{\nu\mu}(L)$

inverse = transpose

More generally

Since  $x_\mu^2$  is Lorentz invariant scalar,

$$x_\mu'^2 = a_{\mu\nu}(L) a_{\mu\lambda}(L) x_\nu x_\lambda = x_\lambda^2$$

$$\Rightarrow a_{\mu\nu}(L) a_{\mu\lambda}(L) = \delta_{\nu\lambda}$$

$$\Rightarrow a_{\nu\mu}^t(L) a_{\mu\lambda}(L) = \delta_{\nu\lambda}$$

$$\Rightarrow a_{\nu\mu}^t = a_{\mu\nu}^{-1}(L) \quad \text{transpose} = \text{inverse}$$

$a_{\mu\nu}$  is  $4 \times 4$  orthogonal matrix

If  $L_1$  is a Lorentz transf from  $K$  to  $K'$

$L_2$  is a Lorentz transf from  $K'$  to  $K''$

Then the Lorentz transf from  $K$  to  $K''$  is given by the matrix

$$a(L_2 L_1) = a(L_2) a(L_1)$$

if  $L_1 = L$  and  $L_2 = L^{-1}$  so  $L_2 L_1 = I$  identity

$$\Rightarrow a^{-1}(L) = a(L^{-1})$$

$$dx_\mu = (dx_1, dx_2, dx_3, icdt)$$

$$-(dx_\mu)^2 \equiv c^2 ds^2 = c^2 dt^2 - dr^2 \quad \text{Lorentz invariant scalar}$$

$$ds^2 = dt^2 \left[ 1 - \frac{1}{c^2} \left( \frac{dx_1}{dt} \right)^2 - \frac{1}{c^2} \left( \frac{dx_2}{dt} \right)^2 - \frac{1}{c^2} \left( \frac{dx_3}{dt} \right)^2 \right]$$

$$ds^2 = \frac{dt^2}{\gamma^2}$$

$$\boxed{ds = \frac{dt}{\gamma}} \quad \text{proper time interval}$$

A 4-vector is any 4 numbers that transform under a Lorentz transformation the same way as does  $x_\mu$

4-velocity  $u_\mu \equiv \frac{dx_\mu}{ds} \equiv \dot{x}_\mu$

$$= \gamma \frac{dx_\mu}{dt}$$

space components  $\vec{u} = \gamma \vec{v}$

$$u_i = ic\gamma$$

$$u_\mu u_\mu = \gamma^2 v^2 - c^2 \gamma^2 = \gamma^2 (v^2 - c^2)$$

$$= \frac{v^2 - c^2}{1 - \frac{v^2}{c^2}} = -c^2$$

4-acceleration  $a_\mu \equiv \frac{du_\mu}{ds} = \gamma \frac{du_\mu}{dt}$

4-gradient  $\frac{\partial}{\partial x_\mu} \equiv \left( \vec{\nabla}, -\frac{i}{c} \frac{\partial}{\partial t} \right)$

proof  $\frac{\partial}{\partial x_\mu}$  is a 4-vector

$$\frac{\partial}{\partial x'_\mu} = \frac{\partial x_\lambda}{\partial x'_\mu} \frac{\partial}{\partial x_\lambda}$$

but  $\frac{\partial x_\lambda}{\partial x'_\mu} = a_{\mu\lambda}(L^{-1})$

$$= a_{\mu\lambda}(L) \frac{\partial}{\partial x_\lambda}$$

so transforms same as  $x_\mu$

$$\left( \frac{\partial}{\partial x_\mu} \right)^2 = \nabla^2 - \frac{1}{c^2} \frac{\partial^2}{\partial t^2}$$

wave equation operator!

inner products

If  $u_\mu$  and  $v_\mu$  are 4-vectors, then  $u_\mu v_\mu$  is Lorentz invariant scalar

## Electromagnetism


Clearly  $\vec{E}$  &  $\vec{B}$  must transform into each other under Lorentz trans.

in inertial frame K  
stationary line charge  $\lambda$



↙ ↘  
cylindrical outward  
electric field  
no B-field

in frame K' moving with  $\vec{v}$   $\parallel$  to wire

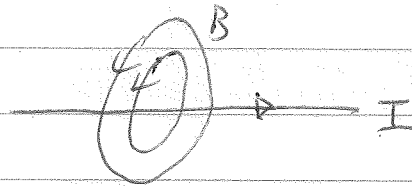

moving line charge gives current  
 $\Rightarrow$  B circulating around wire  
as well as outward radial E

## Lorentz force

$$\vec{F} = q\vec{E} + q\frac{\vec{v}}{c} \times \vec{B}$$

What is the velocity  $\vec{v}$  here? velocity with respect to what inertial frame? clearly  $\vec{E}$  &  $\vec{B}$  must change from one inertial frame to another if this force law can make sense.

## charge density

Consider charge  $\Delta Q$  contained in a vol  $\Delta V$ .  
 $\Delta Q$  is a Lorentz invariant scalar.

Consider the reference frame in which the charge is instantaneously at rest. In this frame

$$\Delta Q = \rho^{\circ} \Delta V \quad \begin{array}{l} \rho^{\circ} \text{ is charge density in the rest frame} \\ \Delta V \text{ is volume in the rest frame} \end{array}$$

$\rho^{\circ}$  is Lorentz invariant by definition

Now transform to another frame moving with  $\vec{v}$  with respect to rest frame.

$\Delta Q$  remains the same

$$\Delta V = \frac{\Delta V^{\circ}}{\gamma} \quad \text{volume contracts in direction } \parallel \text{ to } \vec{v}$$

$$\rho = \frac{\Delta Q}{\Delta V} = \frac{\Delta Q}{\Delta V^{\circ}} \gamma = \rho^{\circ} \gamma$$

Current density is  $\vec{j} = \rho \vec{v} = \gamma \vec{v} \cdot \rho = \rho^{\circ} \vec{u}$

Define 4-current  $\boxed{j_{\mu} = (\vec{j}, ic\rho)} = \rho^{\circ} (\vec{u}, ic\gamma)$   
 $= \rho^{\circ} u_{\mu}$

It is 4-vector since  $u_{\mu}$  is 4-vector and  $\rho^{\circ}$  is Lorentz invariant scalar.

charge conservation

$$\vec{\nabla} \cdot \vec{j} + \frac{\partial \rho}{\partial t} = \boxed{\frac{\partial j_{\mu}}{\partial x_{\mu}} = 0}$$

Equation for potentials in Lorentz gauge

$$\left(\nabla^2 - \frac{1}{c^2} \frac{\partial^2}{\partial t^2}\right) \vec{A} = -\frac{4\pi}{c} \vec{j}$$

$$\left(\nabla^2 - \frac{1}{c^2} \frac{\partial^2}{\partial t^2}\right) \phi = -4\pi \rho$$

$$\frac{\partial^2}{\partial x_\mu^2} = \left(\nabla^2 - \frac{1}{c^2} \frac{\partial^2}{\partial t^2}\right) \text{ is Lorentz invariant operator}$$

4-potential  $A_\mu = (\vec{A}, i\phi)$

$$\left(\nabla^2 - \frac{1}{c^2} \frac{\partial^2}{\partial t^2}\right) A_\mu = \left[-\frac{4\pi}{c} j_\mu = \frac{\partial^2 A_\mu}{\partial x_\lambda^2}\right]$$

Lorentz gauge condition is

$$\vec{\nabla} \cdot \vec{A} + \frac{\partial \phi}{c \partial t} = \frac{\partial A_\mu}{\partial x_\mu} = 0$$

Electric and magnetic fields

$$B_i = \frac{\partial A_k}{\partial x_j} - \frac{\partial A_j}{\partial x_k} \quad i, j, k \text{ cyclic permutation of } 1, 2, 3$$

$$E_i = -\frac{\partial \phi}{\partial x_i} - \frac{\partial A_i}{c \partial t} = c \left( \frac{\partial A_4}{\partial x_i} - \frac{\partial A_i}{\partial x_4} \right)$$

Define field stress tensor

$$F_{\mu\nu} = \frac{\partial A_\nu}{\partial x_\mu} - \frac{\partial A_\mu}{\partial x_\nu} = -F_{\nu\mu}$$

$$= \begin{pmatrix} 0 & B_3 & -B_2 & -iE_1 \\ -B_3 & 0 & B_1 & -iE_2 \\ B_2 & -B_1 & 0 & -iE_3 \\ iE_1 & iE_2 & iE_3 & 0 \end{pmatrix}$$

"curl" of a 4-vector is a 4x4 anti-symmetric 2<sup>nd</sup> rank tensor