

Magneto statics

Bar magnets - $\vec{j} = 0$, \vec{M} fixed and given

(not a linear material)

$$\vec{\nabla} \cdot \vec{B} = 0$$

$$\vec{\nabla} \times \vec{H} = \frac{4\pi}{c} \vec{j} = 0$$

$$\vec{\nabla} \times \vec{H} = 0 \Rightarrow \vec{H} = -\vec{\nabla} \phi_M \quad \text{magnetic scalar potential}$$

$$\vec{B} = \vec{H} + 4\pi \vec{M}$$

$$\vec{\nabla} \cdot \vec{B} = \vec{\nabla} \cdot (\vec{H} + 4\pi \vec{M}) = 0$$

$$\vec{\nabla} \cdot \vec{H} = -\nabla^2 \phi_M = -4\pi \vec{\nabla} \cdot \vec{M}$$

$$\nabla^2 \phi_M = 4\pi \vec{\nabla} \cdot \vec{M}$$


so $\rho_M = -\vec{\nabla} \cdot \vec{M}$ looks like a magnetic "charge"
∅_M is source for \vec{H}

Also at surfaces of material $\sigma_M = \vec{M} \cdot \vec{n}$ looks like surface charge

$$\vec{H}(\vec{r}) = \int_V d\vec{r}' \rho_M(\vec{r}') \frac{(\vec{r} - \vec{r}')}{|\vec{r} - \vec{r}'|^3} + \int_S da' \sigma_M(\vec{r}') \frac{(\vec{r} - \vec{r}')}{|\vec{r} - \vec{r}'|^3}$$

Field lines for \vec{H} can start and end at sources and sinks given by ρ_M and σ_M

$$\vec{M} = M \hat{z}$$




$$\text{bound currents } \vec{j}_b = C \vec{\nabla} \times \vec{M} = 0$$

$$\vec{k}_b = C \vec{M} \times \hat{n}$$

$$K_b = \begin{cases} CM & \text{on side} \\ 0 & \text{on top + bottom} \end{cases}$$

K_b is like solenoid current.

field lines of \vec{B} look like

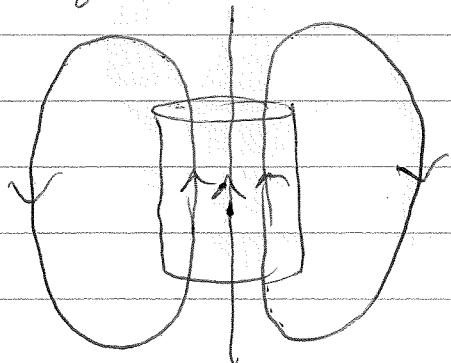


But \vec{H} is determined as follows:

$$\vec{s}_M = -\vec{\nabla} \cdot \vec{M} = 0$$

$$\vec{o}_M = \vec{n} \cdot \vec{M} = \begin{cases} M & \text{on top} \\ -M & \text{on bottom} \end{cases}$$

field lines of \vec{H} look like parallel plate capacitor

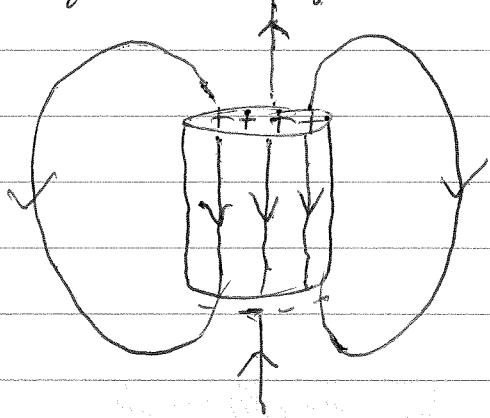

field lines of \vec{H} = field lines of \vec{B} outside magnet, but they are very different inside the magnet!

Conservation of Energy

- leave macroscopic Maxwell eqns
for present. \vec{E} , \vec{B} , ρ , \vec{J} are now
the exact microscopic quantities

Consider a collection of charged particles, described by
charge density ρ and current density \vec{J} . The particles
are contained in a volume V .

Define E_{mech} as total "mechanical" energy of the
particles. $E_{\text{mech}} = \text{sum of particles kinetic energy}$
plus potential energy of any non-electromagnetic forces.

The particles will exert forces on each other via
their electromagnetic interactions, i.e. via the \vec{E} and \vec{B}
fields that they create. Define W as the work done
on the particles by all electromagnetic forces. Then,
by the work-energy theorem of mechanics:

$$\frac{dE_{\text{mech}}}{dt} = \frac{dW}{dt}$$

For a single charge q_i , $\frac{dW}{dt} = \vec{F}_i \cdot \vec{v}_i$
(at \vec{r}_i with velocity \vec{v}_i)

$$\begin{aligned} &= q_i \vec{E}(\vec{r}_i) \cdot \vec{v}_i + q_i (\vec{v}_i \times \vec{B}) \cdot \vec{v}_i \\ &= q_i \vec{E}(\vec{r}_i) \cdot \vec{v}_i \quad \text{O} \end{aligned}$$

For the collection of charges, with

$$\vec{f}(\vec{r}_i) = \sum_i q_i \vec{v}_i \delta(\vec{r} - \vec{r}_i(t))$$

the total rate of work done is

$$\frac{dw}{dt} = \sum_i q_i \vec{v}_i \cdot \vec{E}(\vec{r}_i) = \int_V d^3r \vec{f} \cdot \vec{E}$$

So

$$\frac{dE_{\text{mech}}}{dt} = \int_V d^3r \vec{f} \cdot \vec{E}$$

By Maxwell equation $\vec{\nabla} \times \vec{B} = \frac{4\pi}{c} \vec{f} + \frac{1}{c} \frac{\partial \vec{E}}{\partial t}$
we can write

$$\vec{f} = \frac{c}{4\pi} \left[\vec{\nabla} \times \vec{B} - \frac{1}{c} \frac{\partial \vec{E}}{\partial t} \right]$$

$$\int_V d^3r \vec{f} \cdot \vec{E} = \int_V d^3r \frac{c}{4\pi} \left[(\vec{\nabla} \times \vec{B}) \cdot \vec{E} - \frac{1}{c} \frac{\partial \vec{E}}{\partial t} \cdot \vec{E} \right]$$

use $\frac{\partial \vec{E}}{\partial t} \cdot \vec{E} = \frac{1}{2} \frac{\partial E^2}{\partial t}$

$$\vec{\nabla} \cdot (\vec{E} \times \vec{B}) = (\vec{\nabla} \times \vec{E}) \cdot \vec{B} - \vec{E} \cdot (\vec{\nabla} \times \vec{B})$$

$$\Rightarrow \vec{E} \cdot (\vec{\nabla} \times \vec{B}) = (\vec{\nabla} \times \vec{E}) \cdot \vec{B} - \vec{\nabla} \cdot (\vec{E} \times \vec{B})$$

then use $\vec{\nabla} \times \vec{E} = -\frac{1}{c} \frac{\partial \vec{B}}{\partial t}$

$$so \vec{E} \cdot (\vec{\nabla} \times \vec{B}) = -\frac{1}{c} \frac{\partial \vec{B}}{\partial t} \cdot \vec{B} - \vec{\nabla} \cdot (\vec{E} \times \vec{B})$$

$$= -\frac{1}{2c} \frac{\partial B^2}{\partial t} - \vec{\nabla} \cdot (\vec{E} \times \vec{B})$$

Combine results to get

$$\int_V d^3r \vec{J} \cdot \vec{E} = -\frac{1}{4\pi} \int_V d^3r \left[\frac{1}{2} \frac{\partial \vec{B}^2}{\partial t} + \frac{1}{2} \frac{\partial \vec{E}^2}{\partial t} + c \vec{v} \cdot (\vec{E} \times \vec{B}) \right]$$

define $u = \frac{1}{8\pi} (\vec{E}^2 + \vec{B}^2)$ electromagnetic energy density

$$\vec{S} = \frac{c}{4\pi} \vec{E} \times \vec{B}$$

Poynting vector - energy current

then

$$\frac{dE_{\text{mech}}}{dt} = \int_V d^3r \vec{J} \cdot \vec{E} = - \int_V d^3r \left[\frac{\partial u}{\partial t} + \vec{\nabla} \cdot \vec{S} \right]$$

If we define E_{EM} , the electromagnetic energy of the volume V , as

$$E_{\text{EM}} = \int_V d^3r u$$

then

$$\frac{d}{dt} (E_{\text{mech}} + E_{\text{EM}}) = - \oint_S da \vec{n} \cdot \vec{S}$$

or we write $\frac{dE_{\text{mech}}}{dt} + \vec{J} \cdot \vec{E}$ as the law of conservation of mechanical energy

or we can write in differential form

$$\vec{J} \cdot \vec{E} + \frac{\partial u}{\partial t} + \vec{\nabla} \cdot \vec{S} = 0$$

rate of change of mechanical energy per unit volume

local energy conservation law if interpret \vec{S} as energy current and u as EM energy density

$$\frac{d}{dt} (E_{\text{mech}} + E_{\text{EM}}) = - \oint_S da \vec{n} \cdot \vec{s}$$

total energy in V can decrease only if electromagnetic energy is being transported through the surface S by the EM energy current \vec{s} .

assumes the charged particles do not leave the volume V .

under certain conditions, we can derive a similar conservation law for the macroscopic maxwell eqns.

Consider that \vec{j} is current of the free charged particles.

Then repeating the above steps:

$$\int_V d^3r \vec{j} \cdot \vec{E} = \frac{c}{4\pi} \int d^3r \vec{E} \cdot \left[\vec{\nabla} \times \vec{H} - \frac{1}{c} \frac{\partial \vec{D}}{\partial t} \right]$$

$$\begin{aligned} \vec{\nabla} \cdot (\vec{E} \times \vec{H}) &= \vec{H} \cdot (\vec{\nabla} \times \vec{E}) - \vec{E} \cdot (\vec{\nabla} \times \vec{H}) \\ &= -\frac{1}{c} \vec{H} \cdot \frac{\partial \vec{B}}{\partial t} - \vec{E} \cdot (\vec{\nabla} \times \vec{H}) \end{aligned}$$

S^2

$$\int_V d^3r \vec{j} \cdot \vec{E} = -\frac{1}{4\pi} \int_V d^3r \left[c \vec{\nabla} \cdot (\vec{E} \times \vec{H}) + \vec{E} \cdot \frac{\partial \vec{D}}{\partial t} + \vec{H} \cdot \frac{\partial \vec{B}}{\partial t} \right]$$

If the medium is linear, and we have quasistatic conditions, so that

$$\vec{D}(t) \approx \epsilon \vec{E}(t)$$

$$\vec{H}(t) \approx \frac{1}{\mu} \vec{B}(t)$$

then we can write

$$\vec{E} \cdot \frac{\partial \vec{D}}{\partial t} = \epsilon \vec{E} \cdot \frac{\partial \vec{E}}{\partial t} = \frac{1}{2} \epsilon \frac{\partial \vec{E}^2}{\partial t} = \frac{1}{2} \frac{\partial}{\partial t} (\vec{E} \cdot \vec{E})$$

$$\vec{H} \cdot \frac{\partial \vec{B}}{\partial t} = \frac{1}{\mu} \vec{B} \cdot \frac{\partial \vec{B}}{\partial t} = \frac{1}{2\mu} \frac{\partial B^2}{\partial t} = \frac{1}{2} \frac{\partial}{\partial t} (\vec{B} \cdot \vec{H})$$

** Note: in general, as we will soon see, above conditions are not satisfied. E will depend on frequency ω and $\vec{D}(t)$ and $\vec{E}(t)$ are non-locally related in time.

$$\tilde{D}(t) = \int_{-\infty}^t dt' \epsilon(t-t') \tilde{E}(t'). \quad \text{Only at low frequencies,}$$

If it is quasistatic case, can we write $\vec{D}(t) \approx \epsilon(w=0) \vec{E}(t)$.

Assuming the above conditions are met, then

$$\int_V d^3r \vec{j} \cdot \vec{E} + \int_V d^3r \frac{\partial u}{\partial t} = - \oint_S da \hat{n} \cdot \vec{s}$$

$$\text{where } \left\{ \begin{array}{l} U = \frac{1}{8\pi} \left[\vec{E} \cdot \vec{D} + \vec{B} \cdot \vec{H} \right] \\ S = \frac{c}{4\pi} \left[\vec{E} \times \vec{H} \right] \end{array} \right.$$

⇒ electromagnetic energy in dielectric + magnetic materials under quasi static conditions is

$$\int d^3v \left[\frac{1}{8\pi} \vec{E} \cdot \vec{\delta} + \frac{1}{8\pi} \vec{B} \cdot \vec{H} \right]$$

electro static
energy

magnetic field's
energy

Statics

Electrostatic Energy

Returning to microscopic fields and charges

$$\begin{aligned} \mathcal{E} &= \frac{1}{8\pi} \int_V d^3r E^2 \quad \text{use } \vec{E} = -\vec{\nabla}\phi \\ &= \frac{-1}{8\pi} \int_V d^3r (\vec{\nabla}\phi) \cdot \vec{E} \quad \text{use } \vec{\nabla} \cdot (\phi \vec{E}) = \phi \vec{\nabla} \cdot \vec{E} + (\vec{\nabla}\phi) \cdot \vec{E} \\ &= -\frac{1}{8\pi} \int_V d^3r \left[\vec{\nabla} \cdot (\phi \vec{E}) - \phi \vec{\nabla} \cdot \vec{E} \right] \quad \text{use } \vec{\nabla} \cdot \vec{E} = 4\pi\rho \\ &= \frac{1}{2} \int_V d^3r \rho \phi - \frac{1}{8\pi} \int_S da \hat{n} \cdot \phi \vec{E} \quad \text{by Gauss Theorem} \end{aligned}$$

If let V be all space, $S \rightarrow \infty$, then $\phi \sim \frac{1}{r}$, $E \sim \frac{1}{r^2}$
 surface integral $\sim \frac{R^2}{R^3} \rightarrow 0$ as $R \rightarrow \infty$.

$$\boxed{\mathcal{E} = \frac{1}{2} \int_V d^3r \rho \phi}$$

can also use $\phi(\vec{r}) = \int d^3r' \frac{\rho(\vec{r}')}{|\vec{r}-\vec{r}'|}$ to write

$$\boxed{\mathcal{E} = \frac{1}{2} \int_V d^3r \int d^3r' \frac{\rho(\vec{r}) \rho(\vec{r}')}{|\vec{r}-\vec{r}'|}}$$

charge-charge
interaction

Magnetostatic Energy

microscopic fields and currents

$$\begin{aligned}
 E &= \frac{1}{8\pi} \int d^3r B^2 && \text{use } \vec{B} = \vec{\nabla} \times \vec{A} \\
 &= \frac{1}{8\pi} \int d^3r \vec{B} \cdot \vec{\nabla} \times \vec{A} && \text{use } \vec{\nabla} \cdot (\vec{B} \times \vec{A}) = \vec{A} \cdot (\vec{\nabla} \times \vec{B}) \\
 &= \frac{1}{8\pi} \int d^3r \left[\vec{A} \cdot \vec{\nabla} \times \vec{B} - \vec{\nabla} \cdot (\vec{B} \times \vec{A}) \right] && \text{use } \vec{\nabla} \times \vec{B} = \frac{4\pi}{c} \vec{j} \\
 &= \frac{1}{2c} \int d^3r \vec{j} \cdot \vec{A} - \frac{1}{8\pi} \int_S da \hat{n} \cdot (\vec{B} \times \vec{A})
 \end{aligned}$$

as take V to fill all space, $S \rightarrow \infty$, surface term vanishes

$$E = \frac{1}{2c} \int d^3r \vec{j} \cdot \vec{A}$$

$$\text{In Coulomb gauge } \vec{\nabla} \cdot \vec{A} = 0 \Rightarrow \vec{A}(\vec{r}) = \int d^3r' \frac{\vec{j}(\vec{r}')}{|\vec{r} - \vec{r}'|}$$

In any other gauge we have $\vec{A}' = \vec{A} + \vec{\nabla} X$
for some scalar X . So we can always write

$$\vec{A}(\vec{r}) = \int d^3r' \frac{\vec{j}(\vec{r}')}{c |\vec{r} - \vec{r}'|} + \vec{\nabla} X$$

regardless of the choice of gauge, where X is then determined so \vec{A} satisfies the desired gauge condition

$$\mathcal{E} = \frac{1}{2c} \int d^3r d^3r' \frac{\vec{f}(\vec{r}) \cdot \vec{f}(\vec{r}')}{c |\vec{r}-\vec{r}'|} + \frac{1}{2c^2} \int d^3r \vec{f} \cdot \vec{\nabla} X$$

$$\text{2nd term is } \int d^3r \vec{f} \cdot \vec{\nabla} X = \int d^3r [\nabla \cdot (\vec{f} X) - X \nabla \cdot \vec{f}]$$

$$= \oint da \hat{n} \cdot \vec{f} X - \int d^3r X \vec{\nabla} \cdot \vec{f}$$

vaniishes as $S \rightarrow \infty$

vaniishes in
magnetostatics
where $\vec{v} \cdot \vec{f} = 0$

S_0

$$\boxed{\mathcal{E} = \frac{1}{2c^2} \int d^3r d^3r' \frac{\vec{f}(\vec{r}) \cdot \vec{f}(\vec{r}')}{|\vec{r}-\vec{r}'|}}$$

current-current
interaction

Momentum Conservation

For charges q_i at positions \vec{r}_i with velocities \vec{v}_i

$$\frac{d\vec{P}_{\text{mech}}}{dt} = \sum_i \vec{F}_i = \sum_i q_i (\vec{E}(\vec{r}_i) + \frac{1}{c} \vec{v}_i \times \vec{B}(\vec{r}_i))$$

"mechanical"
 momentum of
 the charges

force on
 charge i

$$= \int d^3r \left[\rho \vec{E} + \frac{1}{c} \vec{j} \times \vec{B} \right]$$

$$\rho \vec{E} + \frac{1}{c} \vec{j} \times \vec{B} = \frac{1}{4\pi} \left[\vec{E} (\vec{\nabla} \cdot \vec{E}) + (\vec{\nabla} \times \vec{B} - \frac{1}{c} \frac{\partial \vec{E}}{\partial t}) \times \vec{B} \right]$$

$$\text{Now } \frac{1}{c} \frac{\partial}{\partial t} (\vec{E} \times \vec{B}) = \frac{1}{c} \left(\frac{\partial \vec{E}}{\partial t} \times \vec{B} \right) + \frac{1}{c} \left(\vec{E} \times \frac{\partial \vec{B}}{\partial t} \right) \quad \text{use } \vec{\nabla} \times \vec{E} = -\frac{1}{c} \frac{\partial \vec{B}}{\partial t}$$

$$= \frac{1}{c} \left(\frac{\partial \vec{E}}{\partial t} \times \vec{B} \right) - \vec{E} \times (\vec{\nabla} \times \vec{E})$$

$$\text{So } -\frac{1}{c} \frac{\partial \vec{E}}{\partial t} \times \vec{B} = -\vec{E} \times (\vec{\nabla} \times \vec{E}) - \frac{1}{c} \frac{\partial}{\partial t} (\vec{E} \times \vec{B})$$

Therefore

$$\rho \vec{E} + \frac{1}{c} \vec{j} \times \vec{B} = \frac{1}{4\pi} \left[\vec{E} (\vec{\nabla} \cdot \vec{E}) + \vec{B} (\vec{\nabla} \cdot \vec{B}) - \vec{B} \times (\vec{\nabla} \times \vec{B}) - \vec{E} \times (\vec{\nabla} \times \vec{E}) - \frac{1}{c} \frac{\partial}{\partial t} (\vec{E} \times \vec{B}) \right]$$

Define electromagnetic momentum density

$$\boxed{\vec{\Pi} = \frac{1}{4\pi c} \vec{E} \times \vec{B} = \frac{1}{c^2} \vec{S}} \quad (\vec{S} \text{ o Poynting vector})$$

then

$$\frac{d\vec{P}_{\text{mech}}}{dt} + \frac{d}{dt} \int d^3r \vec{\Pi} = \frac{1}{4\pi} \int d^3r \left[\vec{E} (\vec{\nabla} \cdot \vec{E}) - \vec{E} \times (\vec{\nabla} \times \vec{E}) + \vec{B} (\vec{\nabla} \cdot \vec{B}) - \vec{B} \times (\vec{\nabla} \times \vec{B}) \right]$$

want to rewrite as a surface integral